

Features

Truck	Standard	Options
Standard battery	●	
Side charging (lithium battery)	●	
Side shift battery	●	
Terminal power (12V)	●	
Large-capacity lithium battery		<input type="checkbox"/>
Platform rail		<input type="checkbox"/>
Non-standard series fence		<input type="checkbox"/>
Charger		<input type="checkbox"/>
Solid tire		<input type="checkbox"/>
Non-standard color		<input type="checkbox"/>
Cab		
Tool box	●	
Document bin	●	
Cup holder	●	
Tilt-adjustable steering wheel	●	
Fully suspended console	●	
Seat	●	
Seat belt	●	
Reflective mirror		<input type="checkbox"/>
Large-diameter steering wheel		<input type="checkbox"/>
Suspended seat		<input type="checkbox"/>
Controls and instruments		
LCD display	●	
Safety		
Emergency power-off switch	●	
Horn	●	
Reverse buzzer	●	
Electromagnetic parking brake	●	
Acoustic and optical alarm		<input type="checkbox"/>
Reverse voice buzzer		<input type="checkbox"/>
Fire extinguisher		<input type="checkbox"/>
Lights		
LED integrated headlights (near and far turning streamer)	●	
LED rear combination tri-color light LCD display	●	
Alarm light		<input type="checkbox"/>
Daytime running blue light	●	
LED rear operation light	●	

Features(Optional configuration for models with cabs)

Cab	Standard	Options
Fully enclosed cab		<input type="checkbox"/>
Semi-enclosed cab		<input type="checkbox"/>
Boarding handle		<input type="checkbox"/>
Rearview mirror		<input type="checkbox"/>
Ceiling light		<input type="checkbox"/>
Fan		<input type="checkbox"/>
Front single-sheet wiper		<input type="checkbox"/>
Front wiper injector		<input type="checkbox"/>
Sunshade		<input type="checkbox"/>
Front glass defroster		<input type="checkbox"/>
Heater		<input type="checkbox"/>
Cooling and heating air conditioner		<input type="checkbox"/>

Note: The fan is usually selected for the canopy or cab, and is not recommended to be selected separately; the cab and canopy are equipped with standard reflectors; the daytime running blue light is usually selected with the canopy or cab, and is not recommended to be selected separately.



X SERIES

ELECTRIC PLATFORM TRUCK

With capacity of 8,000 to 16,000kg




AUTHORIZED DEALER

LET THE LITHIUM POWER FREED



INNOVATIVE SOLUTIONS NEW POWER NOW

- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
- / Safe and effective: Charging efficiency as high as 95%.
- / Quick charging.
- / Long-working: 4000 charging cycles, capacity retention greater than 75%.
- / Maintenance-free: Battery does not require manual maintenance.
- / Green and clean: Pollution-free, zero emissions.

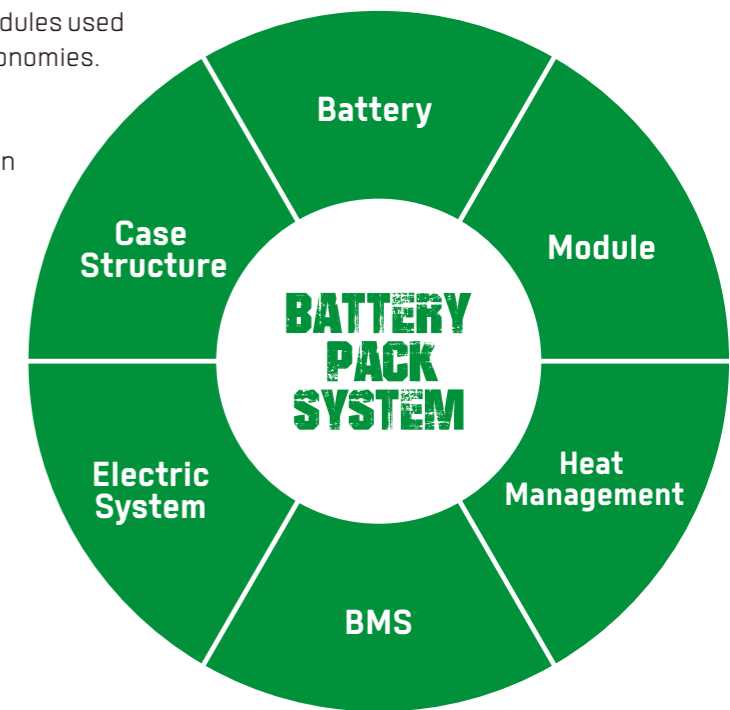

Rapid charging and opportunity charging ensure continuous availability of vehicles

Allow for fast full charging or boost charging.
They are maintenance free and do not require a battery change when used for multi-shift operations.



HANGCHA provides Li-ion battery (LiFePO4) with 6 years or 12000 hours warranty.

**6 YEARS
WARRANTY**

X SERIES ELECTRIC PLATFORM TRUCK

X series electric flatbed trucks are a new series of products independently developed by Hangcha, with safety, reliability, advancement and comfort reaching the world's advanced brand standards, featuring high speed, high efficiency, high safety, etc., thus being an ideal choice for short and medium-distance cargo handling in railway and automobile enterprises.



METICULOUS ON THE INSIDE

The frame, drive axle, steering axle and other main force-bearing components are designed to have high strength, large bearing margin, which can meet the heavy load operating conditions.

Console:

Integral fully-suspended console, flexible connection with the frame, vibration and noise isolation, good comfort.

LED headlamp:

the LED integrated headlamps have daytime running lamps, far/near light, front turning streamer and other functions, safe and energy-saving.

Front anti-collision bumper:

steel plate type front anti-collision bumper, safer and good energy absorption.

Fully hydraulic steering:

standard follow-up steering system, boasting low energy consumption, low noise, light control force, safe and reliable steering, etc. advantages.

Suspended seat:

strong shock absorption, good comfort. (optional)



RELIABILITY AND SAFETY

- The efficient AC power system has standard electromagnetic brake, automatic parking and complete protection functions, greatly improving reliability and service life.
- The electrical components are arranged at height, and the whole vehicle has a high protection level.
- With the battery placed at the bottom of the vehicle frame, the vehicle has good stability, both safe and reliable.



REVOLUTIONARY PERFORMANCE

High-voltage platform, light weight and low power consumption.
Long endurance mileage, optional lithium batteries and large-capacity lead-acid batteries available for the whole series.



Optional battery list(EVE)			
Capacity(Ah)	8t(80V)	10t(80V)	16t(96V)
230	●	●	/
304	○	○	●

Optional battery list(Tian neng)		
Capacity(Ah)	8t(80V)	10t(80V)
250	○	/
275	○	/
300	○	○
350	/	/
385	/	/
420	/	/

Note: ● Standard battery capacity ; ○ Optional battery capacity;

GREAT COMFORT

- Front and rear axles adopt full elastic suspension system, exhibiting low vibration and good smoothness.
- Fully hydraulic steering, standard follow-up steering system, boasting low energy consumption, low noise, light control force, good hand feeling, safe and reliable steering.
- Optional integrally-suspended, fully-enclosed cab can adapt to all-weather operations.

All operation pedals, instruments, steering wheel and switches are subject to optimal configuration ergonomically for comfortable and flexible operation.



Integral fully-suspended console, double-floating design, vibration and noise isolation, good comfort.



Large open pedals at low position, more legroom, more convenient to get on and off the vehicle.



ADVANCEMENT

High-power AC asynchronous motor + vector control + high efficiency gearbox with large speed ratio can achieve high driving speed, good acceleration performance, high speed for heavy-duty vehicles, high gradient climbing, and large load capacity, featuring high control precision, fast startup, low energy consumption and noise.

 **10X50%**
Max. gradeability(laden)

 **9.0 Km/h**
Travel speed(laden)

MAINTAINABILITY

- Removed from a side of the vehicle, the battery provided in the standard configuration can be repaired, replaced and maintained more easily and is applicable to continuous operating conditions.
- Electric control and electrical components are integrated in the electric control door with latch, which is convenient for debugging and maintenance of the electric control system.



Table of 8-16t platform and fence specification recommendation					
Width	Length	3200	4000	5000	6000
		1800	Standard	○	
2050		Standard	Standard	○	○
2600			○		○


Note: ● Preferred ; ○ Optional Vehicle fence height: 320mm



The large-screen anti-glare LCD display adopted can display power, speed, mileage, fault and other information clearly and accurately even in harsh environments.



The whole vehicle is equipped with LED, and the integrated headlamps have daytime running lamps, far/near light, front turning streamer and other functions.

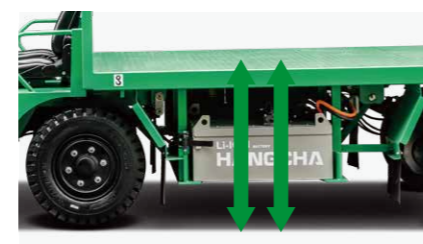

Large ground clearance, small turning radius, good passing ability.

